



Coolscapes™ Reach-In Freezer

- GCF1P-S GBF1P-S GBSF1P-S GCF2P-S GBF2P-S GBSF2P-S
- GCF1P-SH GBF1P-SH GBSF1P-SH GCF2P-SH GBF2P-SH GBSF2P-SH
- GCF3P-S GBF3P-S GBSF3P-S GCF3P-SH GBF3P-SH GBSF3P-SH



GCF1P-SH



- GreenGenius™ R290 top mount refrigeration system featuring TXV expansion valve and hot gas condensate removal
 - Replaceable door opening perimeter heater
 - Digital exterior temperature display with high/low temp visual alarms
 - Energy saving LED interior light
 - Removable side louver
 - Accommodates full size sheet pans
 - Raised ABS interior door liner
 - Gray epoxy coated shelves (3 per section) with shelf bridge
 - Smart door hinge that auto closes up to 90° and stays open past 90°
 - Integral door handle
 - 180° door opening
 - Energy efficient door gasket – removable without tools
 - Locking doors
 - 5” locking casters shipped loose for field installation
 - 10’ cord and plug attached
- Standard Features of the Series GC:**
- Stainless steel exterior front
 - Mill finish aluminum exterior sides
 - Gray coated aluminum interior
 - Anodized aluminum interior floor
 - 5 position pin shelf support
- Standard Features of the Series GB/GBS:**
- Stainless steel exterior front
 - Stainless steel exterior sides
 - Gray coated aluminum interior (Series GB)
 - 200 series stainless steel interior (Series GBS)
 - Stainless steel interior floor
 - Field rehingable doors
 - Stainless steel pilaster with shelf clips
 - Vapor lock relief valve

Refrigeration system: All components are mounted to the top cabinet ceiling, outside the food zone and are assembled as one piece and can be removed as one piece. Environmentally friendly R290 refrigerant is used. System has the capability of maintaining between -5°F and 0°F in heavy use food service operations. Refrigerant is metered using a highly responsive thermostatic expansion valve. System is controlled using an electronic temperature control, which provides improved pull down times, reducing compressor cycling and longer compressor life with lower energy consumption. Control system uses adaptive defrost to assure evaporator coil is free of ice and operating at optimum efficiency. Evaporator condensate is eliminated using an energy efficient hot gas system.

Units are completely insulated with high density foamed in place environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Non GWP (Global Warming Potential) polyurethane.




MODELS LISTED ON BACK



Delfield
www.delfield.com
Tel: 1.800.733.8948



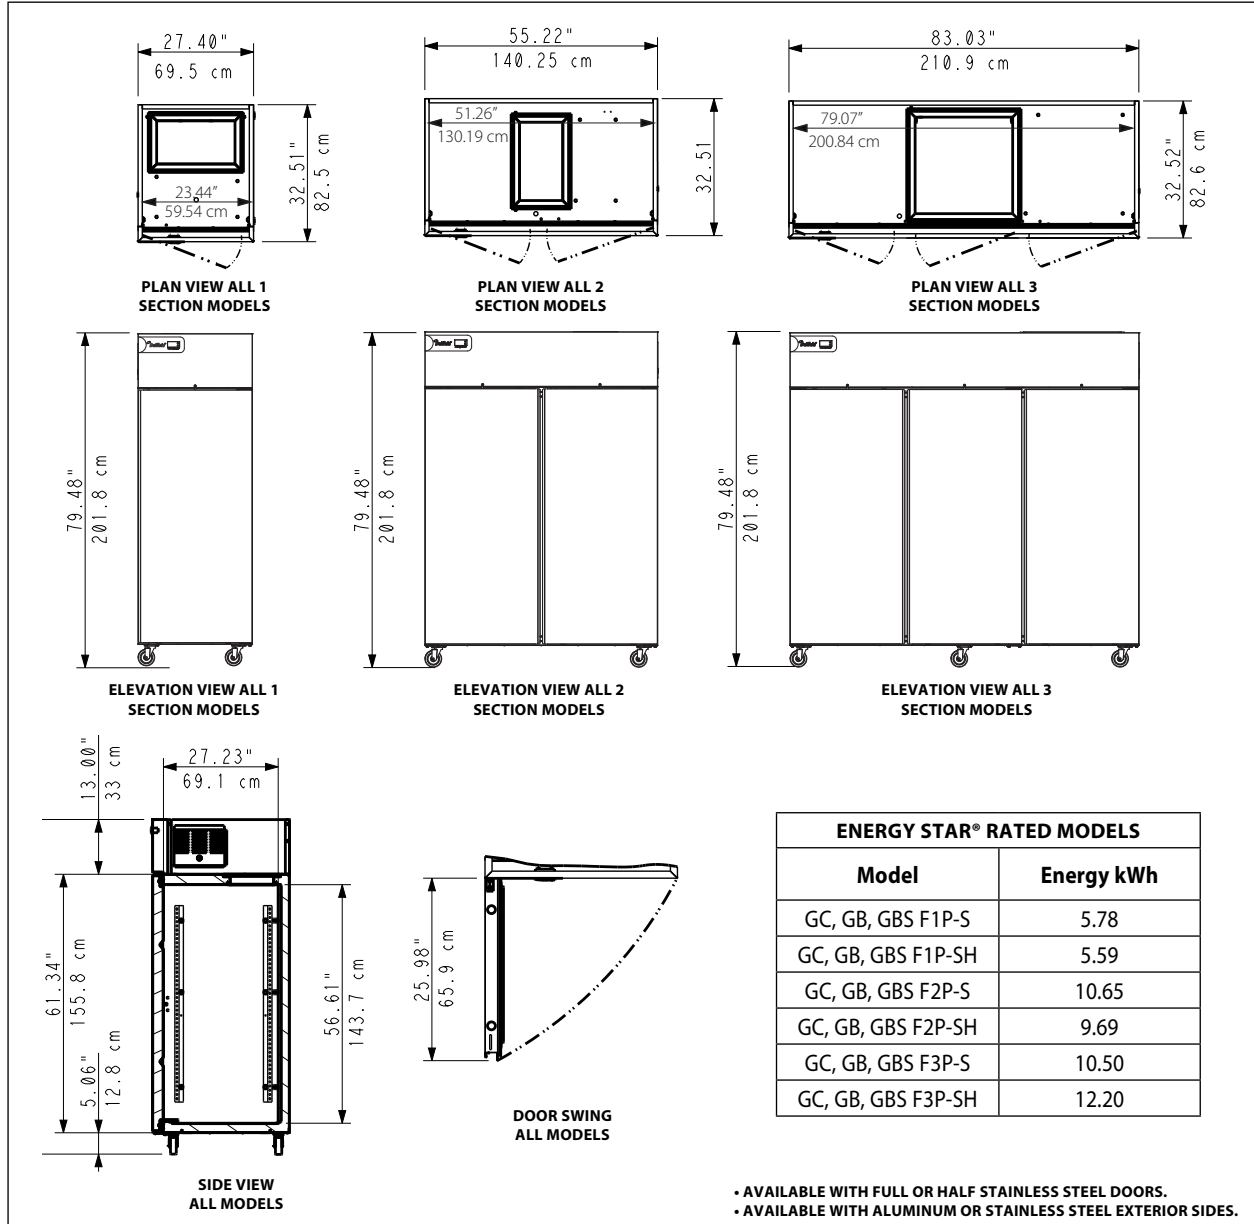

Specifications

Description	Model	V/Hz/ph	Amps	# of Shelves	Volume	H.P.	Nema Plug	
1-section Freezer	GBSF1P-S(H)	115/60/1	7.2	3	21ft3/595L	.55	5-15P	354lbs/161kg
	GBF1P-S(H)							336lbs/152kg
	GCF1P-S(H)							299lbs/136kg
2-section Freezer	GBSF2P-S(H)	115/60/1	10.0	6	46ft3/1303L	.68	5-15P	495lbs/225kg
	GBF2P-S(H)							532lbs/241kg
	GCF2P-S(H)							445lbs/202kg
3-section Freezer	GBSF3P-S(H)	115/60/1	14.7	9	71ft3/2010L	.55(2)	5-20P	772lbs/350kg
	GBF3P-S(H)							772lbs/350kg
	GCF3P-S(H)							707lbs/321kg